



ISO 9001 CERTIFIED

DNH^{AS}

**N-3770 Kragersø
NORWAY**

Phone: (47) 35 98 56 00
Fax: (47) 35 98 56 10
E-mail: dnh@dnh.no
Web-site: www.dnh.no

**DNH WW Ltd.
England**

Phone:.....(44) 1908 275 000
Fax:.....(44) 1908 275 100
E-mail:.....dnh@dnh.co.uk


**DNH GmbH
Germany**

Phone:.....(49) 040 6569 30-0
Fax:.....(49) 040 6569 30-30
E-mail:.....dnh@dnh.de

**DNH
Speakers Inc.
USA**

Phone:.....(1) 484 494 5790
Fax:.....(1) 484 494 5793
E-mail:.....dnh@dnhspeakers.com

MD-200

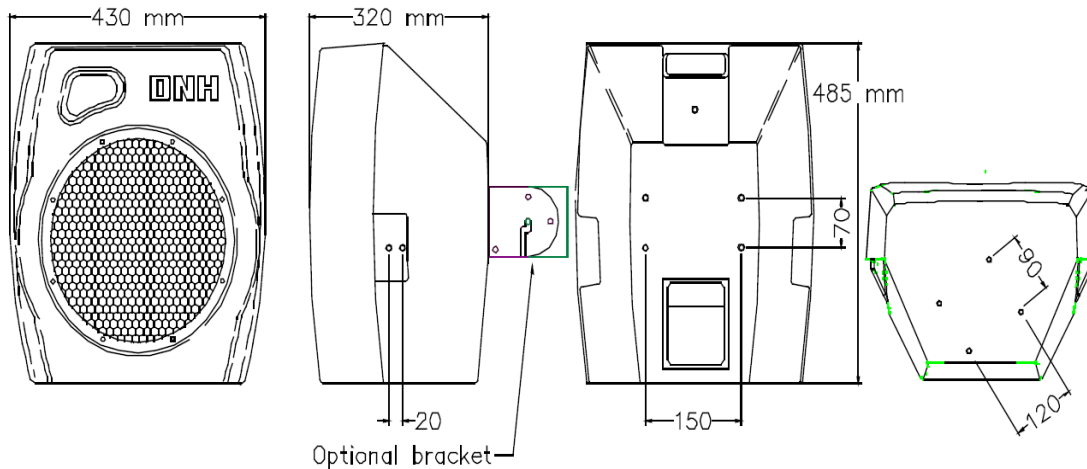

MD-200 is available with transformer on request:


100 V line.

Primary nominal
tappings:

1 : 2	200 W
1 : 3	100 W
1 : 4	50 W

MD-200 is supplied with M8 stainless steel threaded inserts for mounting purposes.
Deviation from the given mounting-hole dimensions might be ± 2 mm.

SPL at different frequencies 1W/1m sine wave

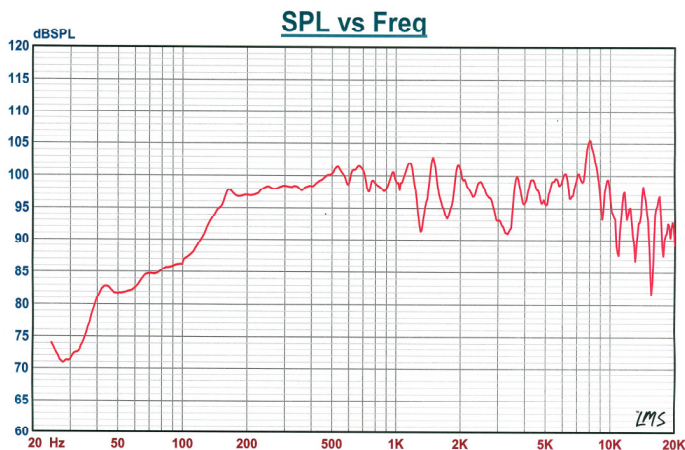

Material / Color Polyethylene / Black
Mounting Bracket, wire or Tripod
Termination Screw terminals
Weight (Without mounting system) 13,3 kg
IP-rating 54
Max. / min. amb. temp 90°C / -40°C
Standard version 8Ω
Rated / max. power 200 W / 300 W
SPL 1W/1m 100 dB
SPL rated power 123 dB
Effective freq. range 60 – 20000 Hz
Dispersion (-6dB) 1kHz / 4kHz 90° / 60°
Directivity factor, Q
Options Impedance, color, label

Installation, Operation and Maintenance Procedures

- MD-200 is available with 200 W transformer and a bracket systems on request.
- If the loudspeaker is supplied with the bracket system, mount the part with a slit on each side to the loudspeaker with four M8 screws, and the other part of the bracket to the wall or ceiling with four screws. Mount two fastening screws to the fixed part in the treaded holes, and slide the loudspeaker on to these screws. Tighten the screws in wanted position, and secure the bracket with four extra bolts and nuts, two on each side of the bracket.
- The loudspeaker is delivered with M8 threaded inserts for mounting purposes.
- For optimum performance, always use the correct power and operate within the frequency limits as stated.
- This loudspeaker is supplied with a 2 year warranty against defective workmanship.



DNH reserves the right to alter specifications without notice.

Rev. 07.04.2011