



DNH

HEAD OFFICE, NORWAY
DNH AS

Phone..... + 47 35 98 56 00
Fax..... + 47 35 98 56 10
E-mail..... dnh@dnh.no
Web-site..... www.dnh.no


ENGLAND
DNH WW Ltd
Phone..... + 44 1908 275 000
Fax..... + 44 1908 275 100
E-mail..... dnh@dnh.co.uk

GERMANY
DNH GmbH
Phone... + 49 040 6569 30-0
Fax..... + 49 040 6569 30-30
E-mail..... dnh@dnh.de

USA
DNH Speakers Inc
Phone..... + 1 484 494 5790
Fax..... + 1 484 494 5793
E-mail..... dnh@dnhspeakers.com


SAFE-561IP(T)

ISO 9001 CERTIFIED

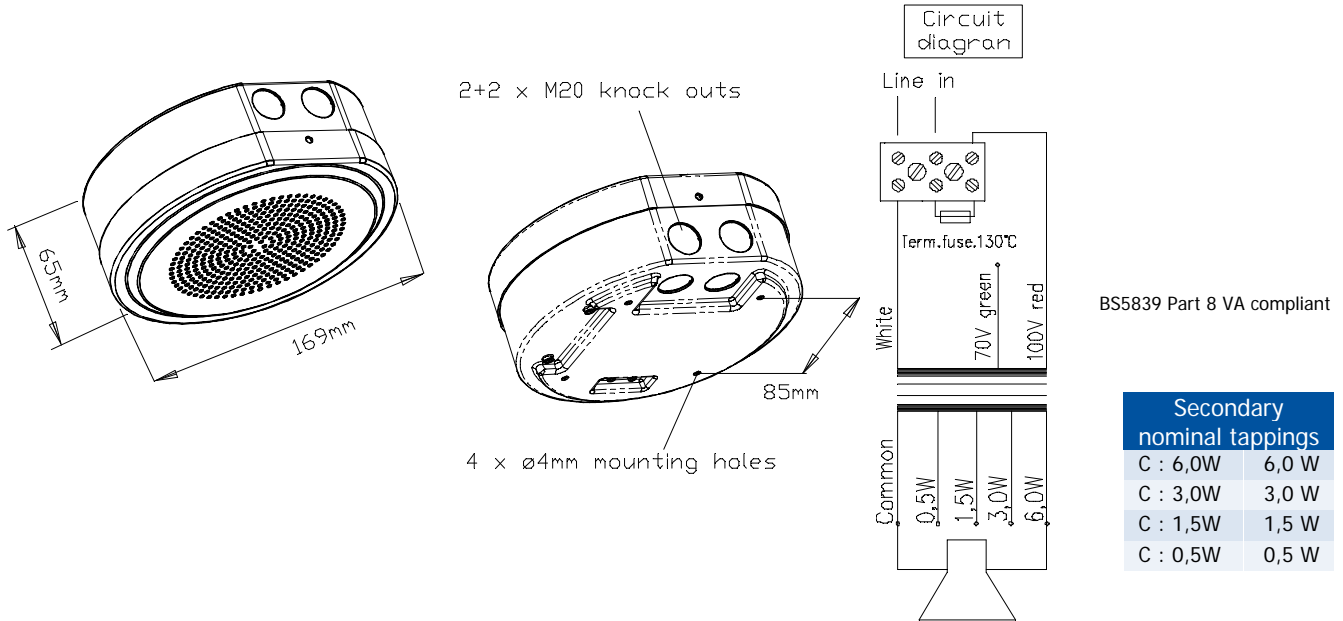

| Secondary nominal tapings | |
|---------------------------|-------|
| C : 6,0W | 6,0 W |
| C : 3,0W | 3,0 W |
| C : 1,5W | 1,5 W |
| C : 0,5W | 0,5 W |

Sound pressure levels at 1W/1m P-6/15B

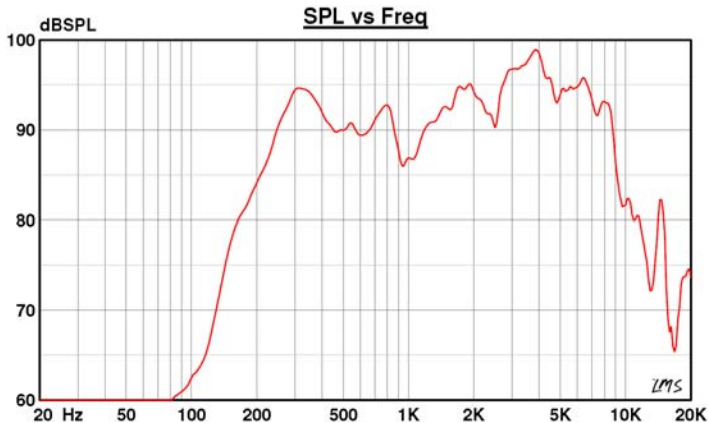

Specifications

| | |
|-------------------------------|----------------------------|
| Material / Color | Steel / White |
| Mounting | Four screws |
| Termination | Ceramic terminals |
| Weight | 1,3 kg |
| IP-rating | 55 |
| Max. / min. amb. temp | 90°C / -20°C |
| Rated / max. power | 6 W / 10 W |
| SPL 1W/1m | 90 dB |
| SPL rated power | 97 dB |
| Effective freq. range | 180 – 13000 Hz |
| Dispersion (-6dB) 1kHz / 4kHz | 187° / 77° |
| Options | Impedances, colors, labels |

Installation, Operation and Maintenance Procedures

- Mount cabinet to wall/ceiling with four suitable screws.
- If 70V, replace red cable with the green cable in the terminal.
- Connect cable to terminal and fasten the front part to the cabinet with two provided screws.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- Do not open loudspeaker when energized.
- This loudspeaker is supplied with a two years warranty against defective materials and workmanship.

DNH reserves the right to alter specifications without notice

