



ISO 9001 CERTIFIED

# DNH<sup>AS</sup>

**N-3770 Kragerø  
NORWAY**

Phone: ..... (47) 35 98 56 00  
Fax: ..... (47) 35 98 56 10  
E-mail: ..... dnh@dnh.no  
Web-site: ..... **www.dnh.no**

**DNH WW Ltd.  
England**

Phone:.....(44) 1908 275 000  
Fax:.....(44) 1908 275 100  
E-mail:.....dnh@dnh.co.uk



**DNH GmbH  
Germany**

Phone:.....(49) 040 6569 30-0  
Fax:.....(49) 040 6569 30-30  
E-mail:.....dnh@dnh.de

**DNH  
Speakers Inc.  
USA**

Phone:.....(1) 484 494 5790  
Fax:.....(1) 484 494 5793  
E-mail:.....dnh@dnhspeakers.com

## CAP-15(T)

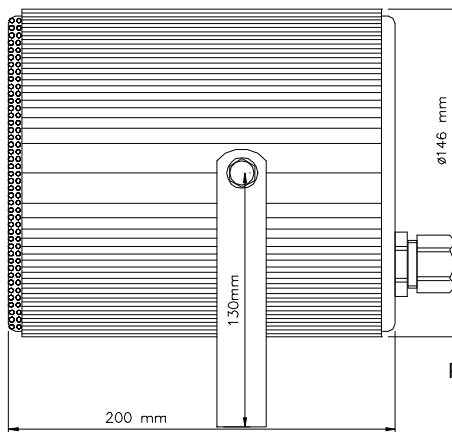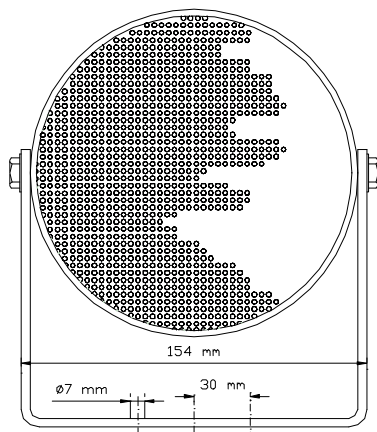

M20  
cable gland  
5 – 12 mm


PA plastic lid

Transformer:  
Combined  
70/100 V line  
5(White) : 7(Green) 70V  
5(White) : 8(Red) 100V

Secondary nominal tappings:

C : 15	15,0 W
C : 10	10,0 W
C : 5	5,0 W
C : 1	1,5 W

Sound pressure levels at different frequencies at 1W/1m  
pink noise.,

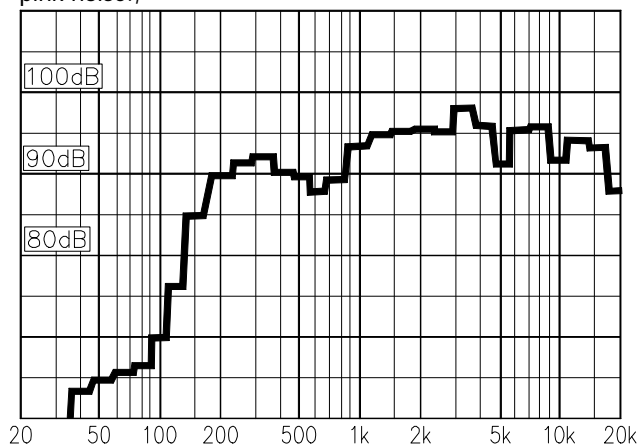

Material / Colour (Aluminium/PA) / RAL9010 or anodized  
Mounting ..... Bracket  
Termination ..... inside chamber  
Weight ..... 2,1 kg  
IP-rating ..... 55  
Max. / min. amb. temp ..... 90°C / -40°C  
Rated / max. power ..... 15 W / 20 W  
SPL 1W/1m ..... 92 dB  
SPL rated power ..... 103 dB  
Effective freq. range ..... 150 – 20000 Hz  
Dispersion (-6dB) 1kHz / 4kHz ..... 130° / 50°  
Directivity factor, Q ..... 15,8  
Options ..... Impedances, colors, labels

### Installation, Operation and Maintenance Procedures

- When mounting the loudspeaker please ensure that it is re-assembled in the same manner in which it was received. Fasten bracket with 1-3 screws.
- For optimum performance, always use the correct voltage / power and operate within the frequency limits as stated.
- It is recommended that the loudspeaker is mounted in such a position so that the front is pointing slightly downwards.
- Tighten the bracket screws on cabinet and make sure that the cable gland is tightened.
- This loudspeaker is supplied with a 2 years warranty against defective workmanship.



DNH reserves the right to alter specifications without notice.

Rev. 29.06.2009